


# Middle, Heavy-Weight Glass Over-Head Transfer Conveyor

## ITX348, 458P&F

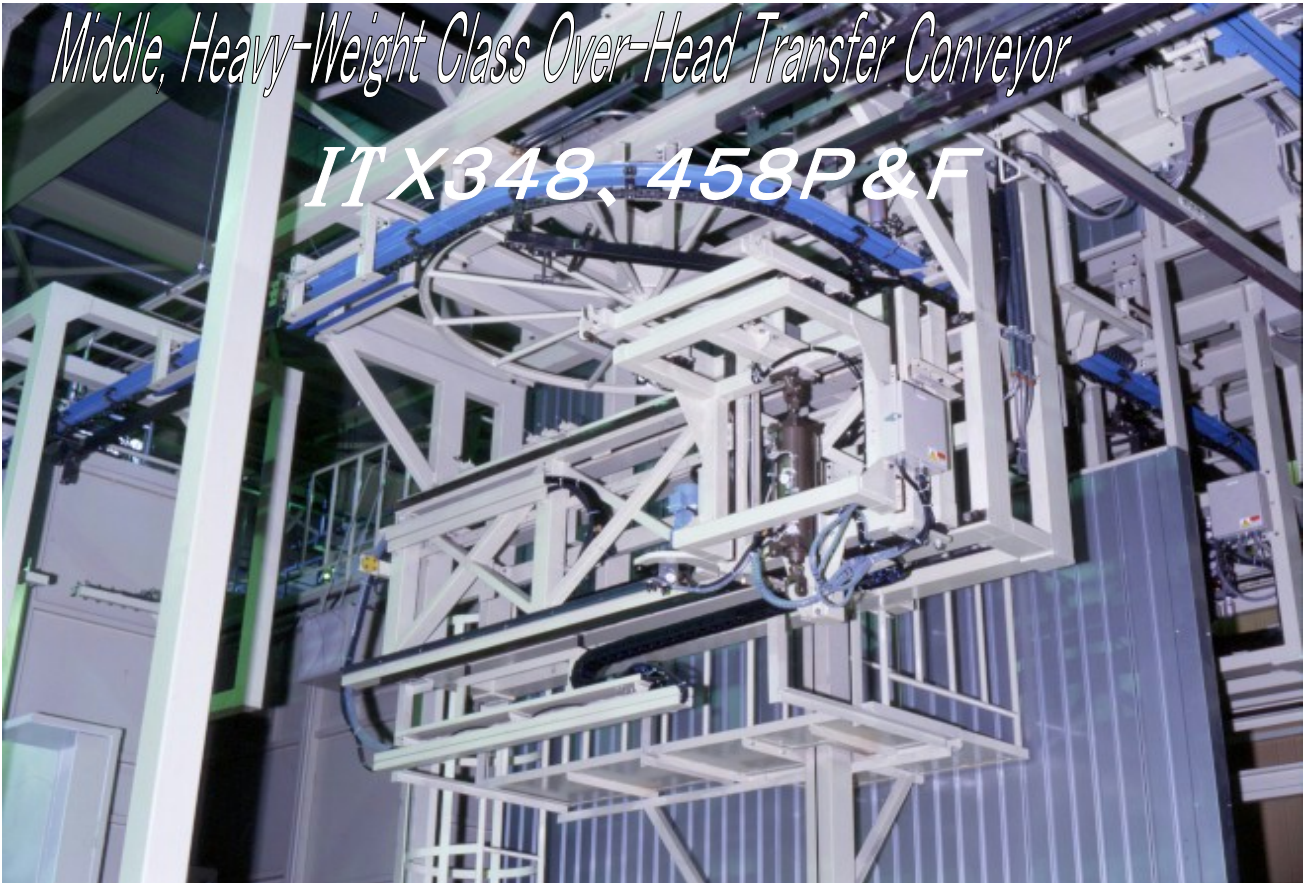

### POINT


- It can be change the working time to flexibility at per each process
- Maintenance is easily possible.
- Possible to make the facilities plan that the nothing dead zone




### Main Specification

■ Work weight	ITX348 ITX458	Max.250kg Max.500kg
■ Transfer speed		Max.15m/min.(12m/min.)
■ Vertical rail		Min.2400mm(3600mm) turning radius
■ Horizontal rail		Min.600mm(800mm) diameter
■ Transfer pitch		600mm(* x 152.4), 1000mm(* x 204.8)
■ Max. slope angle		30 degree

- |                      |                                |
|----------------------|--------------------------------|
| ■ Lubricator device  | ■ Index device                 |
| ■ Turn device        | ■ Transfer device              |
| ■ Drop & Lift device | ■ Divergence & Junction device |



ITX348



ITX458