



Resin Molding Work Transfer Series

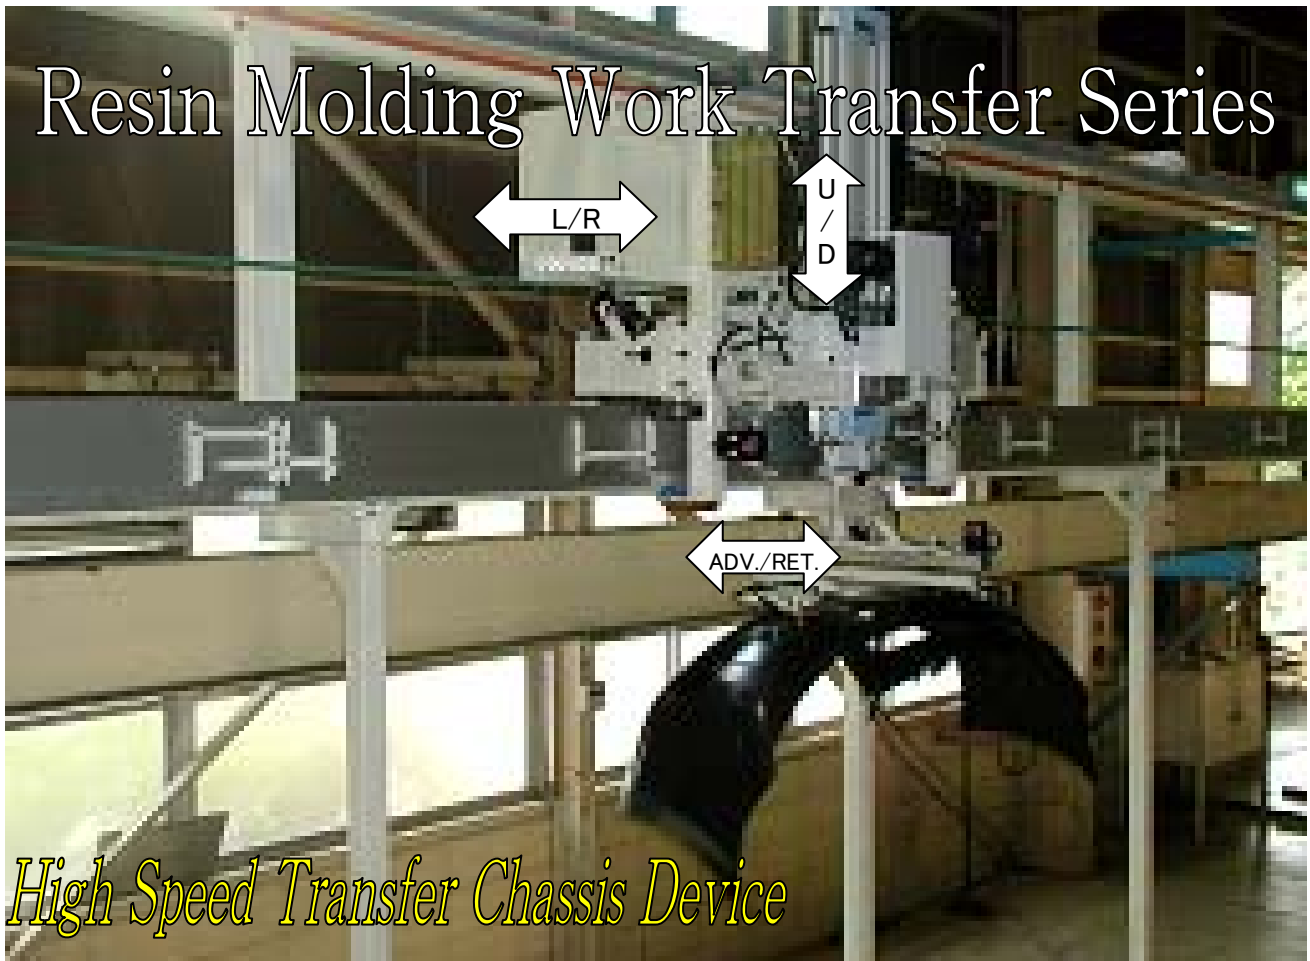

High Speed Transfer Chassis Device

POINTS

- Transfer speed Max.266m/min.
- Holds a slip, abrasion, the outbreak of the sound in check by using a belt, and the noise does not occur at the high speed either.
- It have function of left & right, up & down, adv. & ret. slide transfer.
- Can adjust setting of the stop posiiton freely and stop precision is good.
- Can transport the complicatedly shape bumper with vacuum head.
- With the own company aluminum rail of the standard, short delivered time and low price.
- Easy to maintenance, and the refueling is only for bearing.
- It not necessary to send the air to the machine by a compressor within the machine.

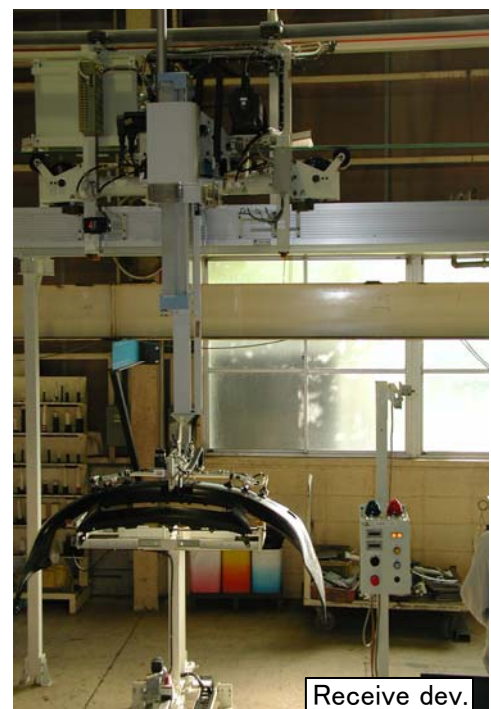

PAT商品

Cat.NO. 0908-q

IZUTECH

7S : スリム・スモール・ショート・シンプル・スマート・スピーディ・サイレント
安全・環境保全・低価格・高品質・CS向上